



INTELLIGENT HOME MEDICAL DEVICE LEADER

SHENZHEN HETAIDA TECHNOLOGY LIMITED COMPANY

Headquarter : Shenzhen HeTaiDa Technology Limited Company

Room 2209, Tower A, Huarun Qianhai Building, No. 5035 Menghai Ave,
Nanshan District, Shenzhen, China

Tel : 400-836-9986

Web : www.hetaida.com.cn

Factory : HeTaiDa Technology Co.,LTD.

8/9F, B2 Building Scientific Research Center,
Songhu Intelligent Valley, No. 6 Minfu Road, Liaobu Town, Dongguan City,
Guangdong Province, China

Tel : +86-0769-83326886 +86-0769-83285552

Web : www.joyhicare.com

Contact : Ms Happy

LinkedIn/WhatsApp/Skype/Phone/WeChat : +86 13602574662

E-mail : Happy@hetaida.com.cn



***BORN FOR LOVE
ACHIEVED UPON ACCURACY***

SHENZHEN HETAIDA TECHNOLOGY LIMITED COMPANY

HETAIDA TECHNOLOGY CO.,LTD.



INTELLIGENT HOME MEDICAL DEVICE LEADER

SLOGAN

Born For Love Achieved Upon Accuracy

MISSION

To Build Reliable Home Medical Device For Love

VISION

To Be The Guardian Of Human Healthy Life

POSITIONING

Intelligent Home Medical Device Leader

VALUE

Innovation, Focus, Reliability, Stability, Harmony, Win-win

CONTENTS

01

ABOUT US

PAGE 03-10

Company Profile	03-04
Milestone	05-06
Enterprise Honor	07-08
Patent & Certificate	09
Cooperation Brands	10

02

BRAND ADVANTAGE

PAGE 11-12

Brand Advantage	11-12
-----------------	-------

03

PRODUCT DISPLAY

PAGE 13-60

Infrared Body Thermometer	15-42
Clinical Electronic Thermometer	43-46
Behind-Ear Hearing Aid	47-50
Electric Nasal Aspirator	51-58
Compressor Nebulizer	59-62
Electronic Blood Pressure Monitor	63-72



COMPANY PROFILE

HETAIDA TECHNOLOGY

INTELLIGENT HOME MEDICAL DEVICE LEADER



HETAIDA TECHNOLOGY is a national high-tech enterprise specializing in R&D, manufacturing, sales and service of intelligent home medical devices, and owns renowned brands such as joyhicare, HeTaiDa etc.

It owns 20,000+ sq.m of Shenzhen Qianhai R&D center and Dongguan Songhu Intelligent Valley High-end manufacturing site in the Greater Bay Area, relies automatic and intelligent equipment, it has established an international leading manufacturing & quality control system.



INTELLIGENT HOME MEDICAL DEVICE LEADER

1000W⁺

Annual sales exceed 10 million units

100⁺

The market covers more than 100 countries and regions around the world

10W⁺

100,000+ Medical institutions and hospitals

HeTaiDa has a diversified technical team composed of clinical experts, masters and doctors for more than 20 years.

With strong technological innovation advantages, HeTaiDa obtained a number of domestic and international technology patents, jointly developed exclusive high-precision sensors with the Chinese Academy of Sciences. It is a pioneer in infrared temperature measurement technology.

Strategic cooperation with many fortune 500 companies such as Mindray in China, Braun in Germany, VICKS in the United States , Devices have been sold to over 100 countries and regions around the world.

HeTaiDa relies on strict quality management system to build reliable and qualified home medical devices for the world, dedicates to provide consumers with great after-sales services, enhance the product use value and help families keep healthy.

DEVELOPMENT MILESTONE

Continue To Surpass & Lead The Way

Focus on Intelligent Home Medical Devices

2003 HETAIDA ESTABLISHED

- Provided infrared technical solutions, modules and algorithms to lots of Industry leaders.

2013 OWN FACTORY FOUND

- Wholly-owned factory founded after 10 years of technical accumulation;
- Finished infrared body thermometer launched;
- Entered the market with leading technology and reliable quality as core competitiveness.

2014-2018 OWN BRAND BUILT

- Obtained the certification of NMPA in China, CE in European, FDA in USA, Pmda in Japan, Canada Health and so on, All the devices could be distributed to relevant markets;
- Repeatedly selected into the government procurement list (China, Korea, Africa);
- Strategic cooperation with many well-known companies such as, **Braun**, **VICKS**, **Mindray**, Walmart, Ensure Pharmaceutical, LBX Pharmacy;
- Since 2016, the shipment volume has ranked into among the top three in the infrared body thermometer industry.

2019 DISTRIBUTION EXTENSION

- Based on the market advantage, Hetaida expanded product line to blood pressure monitor, nebulizer, hearing aid, nasal aspirator, clinical electronic thermometer...etc home medical devices;
- Purchased 10,000sq.m facilities and the company scale expanded;
- Invested automatic equipments to push further improvement of production capacity and quality control.

2020 COVID-19 FIGHTING

- Annual sales exceeded to **10 million units**;
- As benchmark company to flight with Covid-19, was directly taken over by Chinese government;
- Awarded by JD Health and local government for outstanding performance of epidemic prevention and control.

2023-Future FURTHER EXPANDING

- Invested another **10,000sq.m** facilities and company scale expanded further;
- Dedicate to keep offering distinguished good products and outstanding brands to serve global consumers and bringing health and happiness to more people.

2023-FUTURE


ENTERPRISE HONOR

- The Fatest Growth Award from Braun
- Infrared Body Thermometer Leader
- National High-Tech Enterprise
- Repeatedly Selected Into The Government Procurement List
- JD Health Anti-epidemic Pioneer
- Recommended Brand by authoritative Medical Institutions

... ..



The Fatest Growth Award from Braun



Anti epidemic Pioneer Award



Anti epidemic pioneer partner

HONOR



In 2019
Acquired "Fastest Growth Award" as the most potential supplier of Braun



In 2014(Ebola period)
Selected into the procurement list of Chinese government aid to Africa



In 2015 (MERS period)
Selected into the procurement list of Korea government



In 2018
Cooperate with Mindray to establish the primary medical temperature measurement standard, which was reported by CCTV



In 2020 (COVID period)
Awarded as "Anti-epidemic Pioneer" at JD Health Partner Conference

PATENT CERTIFICATION

- National High-Tech Enterprise
- Nearly 100 International & National patents, over 25% are invention patents
- A number of industry-leading technologies: second-generation intelligent scanning technology, nasal aspirator anti backflow technology, etc



INTERNATIONAL AUTHORITY CERTIFICATION

All products are in line with international authoritative certifications



COOPERATION BRANDS

60⁺ FAMOUS BRANDS **10W⁺** MEDICAL INSTITUTIONS AND HOSPITALS

- Serving well-known 3A hospitals and medical institutions
- Covering famous pharmacy chains, supermarkets, pharmaceutical companies, medical device enterprises and baby care brands
- Cooperating with well-known brands such as Braun, Mindray, Neusoft, Ensure Pharmacy, Walmart, JD health, Vicks...etc.

BRAUN

mindray

medisana

Dr. EDISON

VICKS

Walmart



BRAND ADVANTAGES

4 FOUR CORE ADVANTAGES

DECADES OF EXPERIENCE IN HOME MEDICAL DEVICES

01 Focus on cutting-edge technology

- Decades of experience in home medical devices
- Breakthroughs have been made in new technology and new product research

TECHNICAL DIALOGUE WITH BRAUN

02 Win-Win Cooperation

- The only infrared body thermometer manufacturer which could have technology dialogue with Braun
- Cooperated with leading research institutions such as The Chinese Academy of Sciences, keep developing new technologies constantly to create cost-effective and high-quality products
- Diversified R&D teams composed by clinical experts, doctors and masters

CHINESE ACADEMY OF SCIENCES COOPERATED

03 Massive Clinical Data

- Adhering to clinical verification for decades, constantly innovating and using technology to protect the health of every family
- Based on the unique clinical data sharing APP, massive clinical data storage is realized, providing an important scientific basis for product innovation and R&D

MASSIVE CLINICAL DATA SUPPORT

04 Innovation Patent

- Nearly 100 patented technologies and leading the technological trend of intelligent home medical devices
- Intelligent algorithm, temperature scanning measurement, anti-backflow and other advanced technology implanted
- Accurately solve the market pain points, provide customers with better product experience

NEARLY 100 INTERNATIONAL & NATIONAL PATENTS

LEADING THE TREND OF TECHNOLOGICAL DEVELOPMENT



PRODUCT DISPLAY

Joyhicare



HTD8813 (8812/8818D)
Non Contact Infrared
Body Thermometer
PAGE 16



HTD8219
Infrared Body
Thermometer
PAGE 18



H8830
Non Contact Infrared
Body Thermometer
PAGE 20



HTD8823
Infrared Body
Thermometer
PAGE 22



HTD8818
Non Contact Infrared
Body Thermometer
PAGE 24



H8228
Infrared Body
Thermometer
PAGE 26



HTD8808
Non Contact Infrared
Body Thermometer
PAGE 28



HTD8816
Non Contact Infrared
Body Thermometer
PAGE 30



HTD8819
Non Contact Infrared
Body Thermometer
PAGE 32



HTD8216
Infrared Body
Thermometer
PAGE 34



HTD8222
Infrared Body
Thermometer
PAGE 36



HTD8208
Infrared Ear
Thermometer
PAGE 38



K8832
Non Contact Infrared
Body Thermometer
PAGE 40



T8850
Non Contact Infrared
Body Thermometer
PAGE 42



H8601
Clinical Electronic
Thermometer
PAGE 44



H8602
Clinical Electronic
Thermometer
PAGE 46



HTD6101
Behind-Ear
Hearing Aid
PAGE 48



HTD6102
Behind-Ear
Hearing Aid
PAGE 50



HTD2601/2602
Electric Nasal
Aspirator
PAGE 52



H2603
Electric Nasal
Aspirator
PAGE 54



H2605
Electric Nasal
Aspirator
PAGE 56



H2606
Electric Nasal
Aspirator
PAGE 58



HTD2810
Compressor
Nebulizer
PAGE 60



HTD2811
Compressor
Nebulizer
PAGE 62



HTD6601
Electronic Blood
Pressure Monitor
PAGE 64



HTD6602
Electronic Blood
Pressure Monitor
PAGE 66



HTD6603
Electronic Blood
Pressure Monitor
PAGE 68



HTD6605
Electronic Blood
Pressure Monitor
PAGE 70



D6606
Electronic Blood
Pressure Monitor
PAGE 72



1s

MEASUREMENT

SENSING TO 0.1°C CHANGE

Non Contact Infrared Body Thermometer




Model: HTD8813(8818D)



- Medical grade temperature measurement standard
- 50 sets of memory storage
- Automatic power off without operation
- One button mute function
- Easy operation design
- Large LCD with backlight



One Button To Factory Default

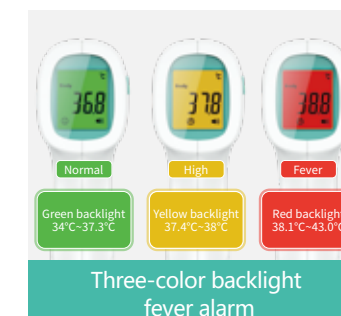

BASIC PARAMETERS


Measurement method:	Spot measurement	Memories:	50
Measurement accuracy:	±0.2°C (±0.4°F)	Display resolution:	0.1°C/0.1°F
Body temp output:	34.0°C ~ 43.0°C (93.2°F-109.4°F)	Auto power off:	≤18 seconds
Surface temp output:	0°C ~ 100°C (32°F -212°F)	Product size:	138mm×95mm×40mm(L×W×H)
Measuring distance:	1-5cm	Product weight:	90g (without battery)
Operating ambient temperature range:	15°C ~ 40°C (59°F-104°F)	Power supply:	DC3.0V(2 AAA alkaline batteries)

INTELLENT
TEMPORAL
SCANNING
TECHNOLOGY

Infrared Body Thermometer

Model: HTD8219

- Ear + forehead measurement 2-in-1
- Latest scanning measurement technology
- Accurate and consistent measurement
- High accuracy measurement
- Recall of 50 memories
- One button mute function

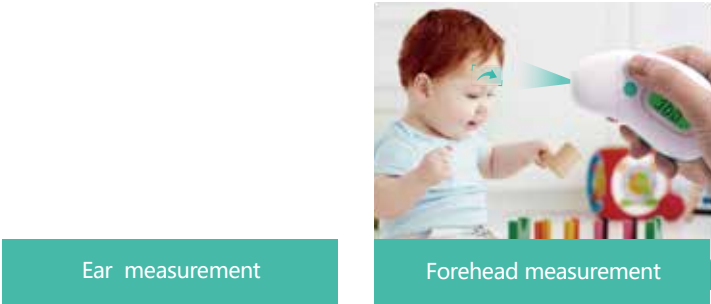

One button mute function

BASIC PARAMETERS

Measurement method:	Spot or scan measurement	Memories:	50
Measuring site:	Forehead or Ear	Display resolution:	0.1°C/0.1°F
Measurement accuracy:	±0.2°C (±0.4°F)	Auto power off:	≤35 seconds
Output range:	34.0°C ~ 43.0°C (93.2°F-109.4°F)	Product size:	93.6mm×51.3mm×24.5mm(L×W×H)
Measuring distance:	<1cm	Product weight:	52g (with battery)
Operating ambient temperature range:	10°C ~ 40°C (50°F-104°F)	Power supply:	DC 3.0V (CR2032 x 1)




NO CONTACT
MEASUREMENT
【1-5CM】

Non Contact Infrared Body Thermometer

Model: H8830

- Multi-mode temperature measurement
- Backlight fever alarm
- Automatic power off without operation
- Easy operation design
- Continuous temperature measurement without waiting
- Multiple memory storage



BASIC PARAMETERS

Measurement method:	Spot measurement	Memories:	50
Measurement accuracy:	±0.2°C (±0.4°F)	Display resolution:	0.1°C/0.1°F
Body temp output:	34.0°C ~ 43.0°C (93.2°F-109.4°F)	Auto power off:	≤18 seconds
Surface temp output:	0°C ~ 100°C (32°F -212°F)	Product size:	136.5mm x 88.8mm x 40.0mm (L×W×H)
Measuring distance:	1-5cm	Product weight:	97g (without battery)
Operating ambient temperature range:	15°C ~ 40°C (59°F-104°F)	Power supply:	DC 3.0V (2 AAA alkaline batteries)





BLU-RAY AUTO TRACK
ACCURATE CARE TO EACH 0.1°C

Infrared Body Thermometer

Model: HTD8823

- Wide-range workingtemp from (5-40°C)
- Easy operation design
- Three-color backlight fever alarm
- High accuracy measurement
- Portable straight plate design



BASIC PARAMETERS

Measurement method:	Spot or scan measurement	Display resolution:	0.1°C/0.1°F
Measurement accuracy:	±0.2°C (±0.4°F)	Auto power off:	≤18 seconds
Output range:	34.0°C ~ 43.0°C (93.2°F-109.4°F)	Product size:	122mm×30mm×43mm(L×W×H)
Measuring distance:	1-5cm	Product weight:	47g (without battery)
Memories:	Last memory	Power supply:	DC 3.0V (2 AAA alkaline batteries)
Operating ambient temperature range:	5°C ~ 40°C (41°F-104°F)		





MEASUREMENT

SENSING TO 0.1°C CHANGE




Non Contact Infrared Body Thermometer

Model: HTD8818

- Multi-mode temperature measurement
- Non-contact temperature measurement
- Attractive flat grip design
- Automatic power off without operation
- Easy operation design
- Suitable for multi-scenario temperature measurement requirement



Three-Color Backlight Fever Alarm



BASIC PARAMETERS

Measurement method:	Spot measurement	Memories:	10
Measurement accuracy:	±0.2°C (±0.4°F)	Display resolution:	0.1°C/0.1°F
Body temp output:	34.0°C ~ 43.0°C (93.2°F-109.4°F)	Auto power off:	≤20 seconds
Surface temp output:	0°C ~ 100°C (32°F -212°F)	Product size:	140mm X 44mm X 37mm(L×W×H)
Measuring distance:	1-5cm	Product weight:	68g (without battery)
Operating ambient temperature range:	15°C ~ 40°C (59°F-104°F)	Power supply:	DC 3.0V (2 AAA alkaline batteries)

MULTIFUNCTIONAL
& MULTI-CARE

Infrared Body Thermometer

Model: H8228

- 4 in 1 highest cost-effective
- Forehead & Ear
- Temporal scan measurement , more accurate
- One button easy operation
- Auto turn off without operation
- Unit changeable °C/°F
- Multi-use for liquid ,food, room temperature



Scanning Measurement



Forehead measurement



Multi-mode temperature measurement



Ear measurement

BASIC PARAMETERS

Measurement method:	Spot or scan measurement	Memories:	Last memory
Measuring site:	Forehead or Ear	Display resolution:	0.1°C/0.1°F
Measurement accuracy:	±0.2°C (±0.4°F)	Auto power off:	≤35 seconds
Body temp output:	34.0°C ~ 42.9°C (93.2°F-109.2°F)	Product size:	152mm x 36mm x 42mm (L×W×H)
Surface temp output:	0°C ~ 100°C (32°F -212°F)	Product weight:	67g (without battery)
Operating ambient temperature range:	15°C ~ 35°C (59°F-95°F)	Power supply:	DC 3.0V (2 AAA alkaline batteries)

HOSPITAL GRADE

LONG MEASURING
DISTANCE UP TO 15CM

Non Contact Infrared Body Thermometer



Model: HTD8808



- High value model for hospitals
- 0.1-15cm long measuring distance
- Multi-use for liquid, food, room temperature
- Sound mute
- Large LCD display
- Auto turn off without operation



Wired & Wireless Data Transmission Optional

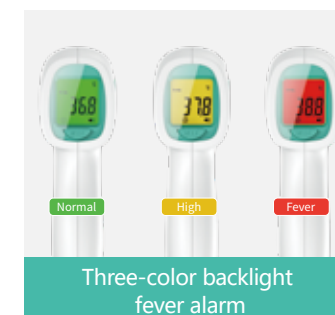

BASIC PARAMETERS

Measurement method: Spot measurement

Measurement accuracy: $\pm 0.2^{\circ}\text{C}$ ($\pm 0.4^{\circ}\text{F}$)

Body temp output: $34.0^{\circ}\text{C} \sim 43.0^{\circ}\text{C}$ ($93.2^{\circ}\text{F} \sim 109.4^{\circ}\text{F}$)

Surface temp output: $0^{\circ}\text{C} \sim 100^{\circ}\text{C}$ ($32^{\circ}\text{F} \sim 212^{\circ}\text{F}$)

Measuring distance: 0.1-15cm

Memories: 50

Display resolution: $0.1^{\circ}\text{C}/0.1^{\circ}\text{F}$

Auto power off: ≤ 18 seconds

Product size: $150\text{mm} \times 95\text{mm} \times 44\text{mm}$ (L×W×H)

Product weight: 116g (without battery)

Power supply: DC 3.0V (2 AAA alkaline batteries)


INTELLIGENT MEASURING

1s FAST READING

Non Contact Infrared Body Thermometer

Model: HTD8816

- Non-contact 1-5cm measuring distance
- Multi-use for liquid, food, room temperature
- Temporal scan measurement
- Three-colors backlight fever alarm
- Auto turn off without operation
- Unit changeable °C/°F

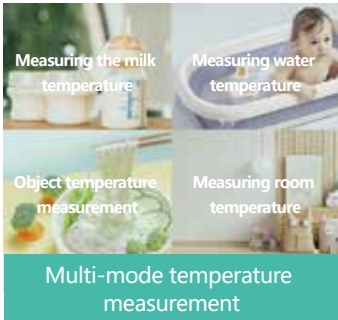

BASIC PARAMETERS

Measurement method:	Spot or scan measurement	Memories:	50
Measurement accuracy:	±0.2°C (±0.4°F)	Display resolution:	0.1°C/0.1°F
Body temp output:	34.0°C ~ 43.0°C (93.2°F-109.4°F)	Auto power off:	≤18 seconds
Surface temp output:	0°C ~ 100°C (32°F -212°F)	Product size:	122mm×96mm×42mm (L×W×H)
Measuring distance:	1-5cm	Product weight:	80g (without battery)
Operating ambient temperature range:	15°C ~ 40°C (59°F-104°F)	Power supply:	DC 3.0V (2 AAA alkaline batteries)



USB RECHARGEABLE


Non Contact Infrared Body Thermometer

Model: HTD8819

- Easy operation design
- Three-color Backlight fever alarm
- USB rechargeable
- Suitable for multi-scenario temperature measurement requirement
- Automatic power off without operation
- Attractive flat grip design




Multi-Mode Temperature Measurement

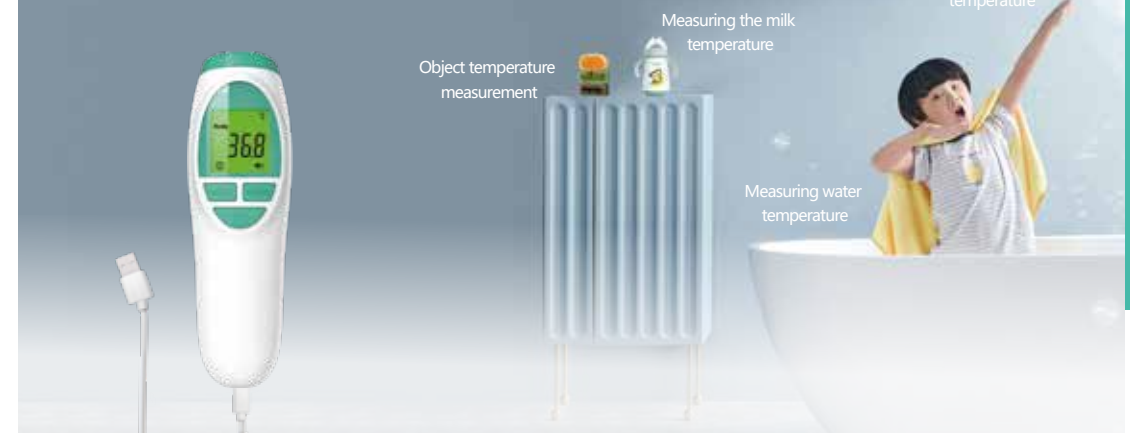

Easy operation design



USB rechargeable

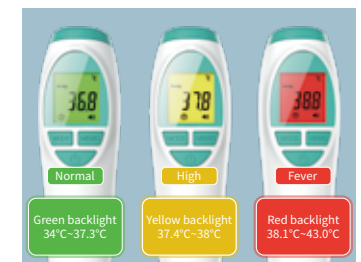

Three-color backlight fever alarm

BASIC PARAMETERS

Measurement method: Spot measurement

Measurement accuracy: $\pm 0.2^{\circ}\text{C}$ ($\pm 0.4^{\circ}\text{F}$)

Body temp output: $34.0^{\circ}\text{C} \sim 43.0^{\circ}\text{C}$ ($93.2^{\circ}\text{F} \sim 109.4^{\circ}\text{F}$)

Surface temp output: $0^{\circ}\text{C} \sim 100^{\circ}\text{C}$ ($32^{\circ}\text{F} \sim 212^{\circ}\text{F}$)

Measuring distance: 1-5cm

Memories: 50

Display resolution: $0.1^{\circ}\text{C}/0.1^{\circ}\text{F}$

Auto power off: ≤ 18 seconds

Product size: $140\text{mm} \times 44\text{mm} \times 37\text{mm}$ (L×W×H)

Product weight: 68g (without battery)

Power supply: 3.7 Rechargeable lithium battery



ALL IN ONE
EASY MEASURING

Infrared Body Thermometer

Model: HTD8216

- 4 in 1 highest cost-effective
- Forehead & Ear
- Temporal scan measurement , more accurate
- One button easy operation
- Auto turn off without operation
- Unit changeable °C/°F
- Multi-use for liquid ,food, room temperature



Ear measurement



Forehead measurement



Three-color backlight fever alarm

BASIC PARAMETERS

Measurement method:	Spot or scan measurement	Memories:	Last memory
Measuring site:	Forehead or Ear	Display resolution:	0.1°C/0.1°F
Measurement accuracy:	±0.2°C (±0.4°F)	Auto power off:	≤35 seconds
Body temp output:	34.0°C ~ 42.9°C (93.2°F-109.2°F)	Product size:	154mm×34mm×52mm(L×W×H)
Surface temp output:	0°C ~ 100°C (32°F -212°F)	Product weight:	66g (without battery)
Operating ambient temperature range:	15°C ~ 35°C (59°F-95°F)	Power supply:	DC 3.0V (2 AAA alkaline batteries)

MINI & PORTABLE
FREE MEASURING

Infrared Body Thermometer
Model: HTD8222

- Latest scanning measurement technology
- Forehead & Ear design
- Easy operation design
- Pocket design, Mini & Portable
- Button battery, energy saving and environmental protection
- Three-color backlight fever alarm
- One key switch unit



BASIC PARAMETERS

Measurement method:	Spot or scan measurement	Display resolution:	0.1°C/0.1°F
Measuring site:	Forehead or Ear	Auto power off:	≤35 seconds
Measurement accuracy:	±0.2°C (±0.4°F)	Product size:	118.8mm×33mm×24.8mm(L×W×H)
Output range:	34.0°C ~ 43.0°C (93.2°F-109.4°F)	Product weight:	46g (without battery)
Memories:	Last memory	Power supply:	DC 3.0V (CR2032 x 1)

CONTINUOUS MEASUREMENT WITHOUT WAITING

Infrared Ear Thermometer

Model: HTD8208

- Easy operation without probe cover design
- Three-color Backlight fever alarm
- Lovely dolphin shape design
- Automatic power off without operation
- Ergonomic aesthetics design
- Multipile testing without waiting
- High accuracy measurement



Ambient Temperature Changes Without Waiting



Easy operation without probe cover design



Three-color backlight fever alarm



Cute design

BASIC PARAMETERS

Measurement method: Spot measurement

Measuring site: Ear

measurement accuracy: $\pm 0.2^{\circ}\text{C}$ ($\pm 0.4^{\circ}\text{F}$)

Output range: $34.0^{\circ}\text{C} \sim 42.9^{\circ}\text{C}$ ($93.2^{\circ}\text{F} \sim 109.2^{\circ}\text{F}$)

Memories: 10

Display resolution: $0.1^{\circ}\text{C}/0.1^{\circ}\text{F}$

Auto power off: ≤ 35 seconds

Product size: $160\text{mm} \times 36\text{mm} \times 45\text{mm}$ (L×W×H)

Product weight: 60g (without battery)

Power supply: DC 3.0V (2 AAA alkaline batteries)

MEASURING SITE INDICATION SCANNING MEASUREMENT MORE ACCURACY


Non Contact Infrared Body Thermometer

Model: K8832

- Measuring Site Indication by Blue-light
- NTC Rapid Ambient Temperature Balance
- Blue-Light Auto Track
- Three-Color Indicator for Fever Alarm
- Wide Operating Temperature Range: 5-40°C
- Dual-Modes (body/object)
Measure Temperature
- Scanning Measurement For High Accuracy
- Buzzer alert
- High-definition LCD Display



On-screen Measuring
Distance Detection
System Confirms
Proper Distance



BASIC PARAMETERS

Measurement method: Spot or scan measurement
Measuring site: Forehead
Measurement accuracy: $\pm 0.2^{\circ}\text{C}$ ($\pm 0.4^{\circ}\text{F}$)
Body temp output: $34.0^{\circ}\text{C} \sim 43.0^{\circ}\text{C}$ ($93.2^{\circ}\text{F} \sim 109.4^{\circ}\text{F}$)
Memories: 50

Display resolution: $0.1^{\circ}\text{C}/0.1^{\circ}\text{F}$
Auto power off: ≤ 18 seconds
Product size: $146\text{mm} \times 35\text{mm} \times 41\text{mm}$ (L×W×H)
Product weight: 68g (without battery)
Power supply: DC 3.0V (2 AAA alkaline batteries)







AGE ACCURACY TECHNOLOGY

Non Contact Infrared Body Thermometer

Model: T8850

- Age Group Selection Measurement
- Vibration Prompt
- High-definition LED Display
- Measuring Site Indication by Blue-light
- NTC Rapid Ambient Temperature Balance
- Blue-Light Auto Track
- Wide Operating Temperature Range: 5-40°C
- Dual-Modes (body/object) Measure Temperature
- Three-Color Indicator for Fever Alarm

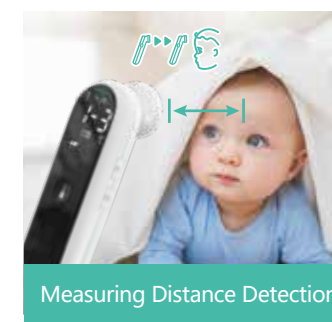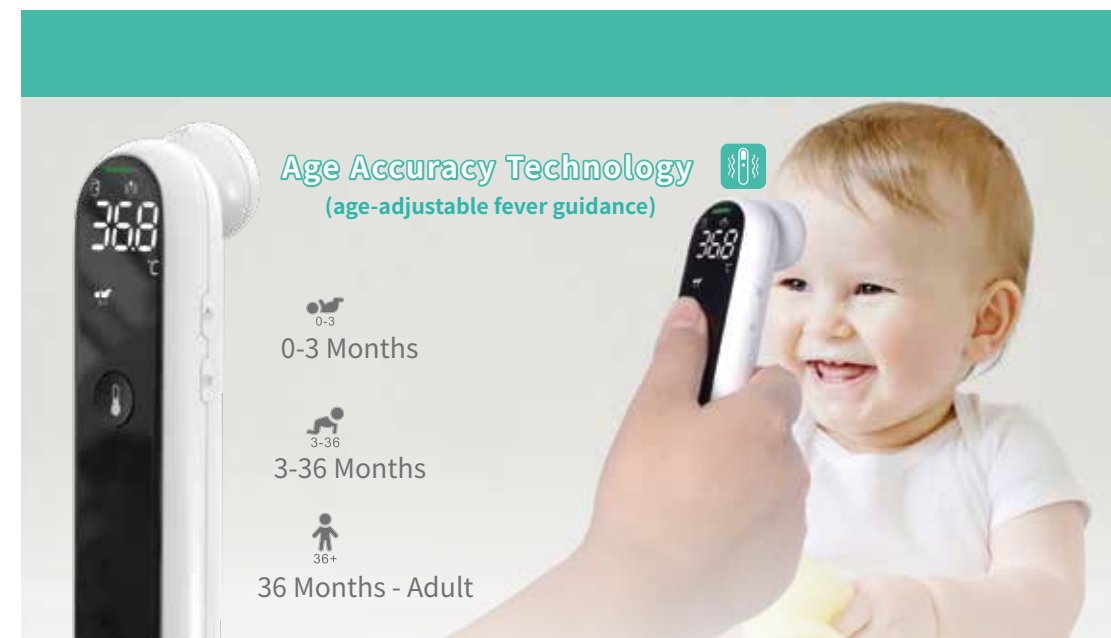

BASIC PARAMETERS

Measurement method: Spot or scan measurement
Measuring site: Forehead
Measurement accuracy: $\pm 0.2^{\circ}\text{C}$ ($\pm 0.4^{\circ}\text{F}$)
Body temp output: $32.0^{\circ}\text{C} \sim 43.0^{\circ}\text{C}$ ($89.6^{\circ}\text{F} \sim 109.4^{\circ}\text{F}$)
Memories: 50

Display resolution: $0.1^{\circ}\text{C}/0.1^{\circ}\text{F}$
Auto power off: ≤ 18 seconds
Product size: $151\text{mm} \times 37\text{mm} \times 38\text{mm}$ (L×W×H)
Product weight: 66g (without battery)
Power supply: DC 3.0V (2 AAA alkaline batteries)



MULTI-USE FOR ORAL / RECTAL / UNDERARM



Clinical Electronic Thermometer

Model: H8601

- Beep sound for fever temperature
- One key operation
- Extra gentle flexible tip
- HD screen
- Washable probe tip
- Slight design, easy carry
- Recall of last memory
- Low power reminder



30s Reading Fast and High Precision



BASIC PARAMETERS

Measurement method:	Real-time	Display resolution:	0.1°C/0.1°F
Measuring site:	Oral, Rectal, Underarm	Auto power off:	≤10 minutes
measurement accuracy:	±0.2°C (±0.4°F)	Product size:	130mm×25mm×9mm (L×W×H)
Output range:	32.0°C~42.9°C/90.0°F~109.9°F	Product weight:	12g (with battery)
Memories:	Last memory	Power supply:	DC1.5V (Battery LR41)



30S READING
FAST AND HIGH
PRECISION

Clinical Electronic Thermometer

Model: H8602

- Extra gentle flexible tip
- Washable probe tip
- HD screen
- Slight design, easy carry
- Low power reminder
- One key operation
- High temperature warning
- Recall of last memory



HD screen



Washable probe tip



High temperature warning

BASIC PARAMETERS


Measurement method:	Real-time	Display resolution:	0.1°C/0.1°F
Measuring site:	Oral, Rectal, Underarm	Auto power off:	≤10 minutes
measurement accuracy:	±0.2°C (±0.4°F)	Product size:	130mm×25mm×9mm (L×W×H)
Output range:	32.0°C~42.9°C/90.0°F~109.9°F	Product weight:	12g (with battery)
Memories:	Last memory	Power supply:	DC1.5V (Battery LR41)

HEAR WHAT YOU LOVE


Behind-Ear Hearing Aid

Model: HTD6101

- 7-10 days continuous battery use
- Stepless volume adjustment with scrolling wheel
- Invisible and ergonomic design fits behind the ear comfortable
- Lightweight & comfortable long-time wearing
- Sweat proof and non-slip
- Small, Medium ,large tips meet different users
- Medical silicone material resist deformation
- Adjustable tube fit right/left ears better
- Intelligent noise reduction provides clearer and more natural sound

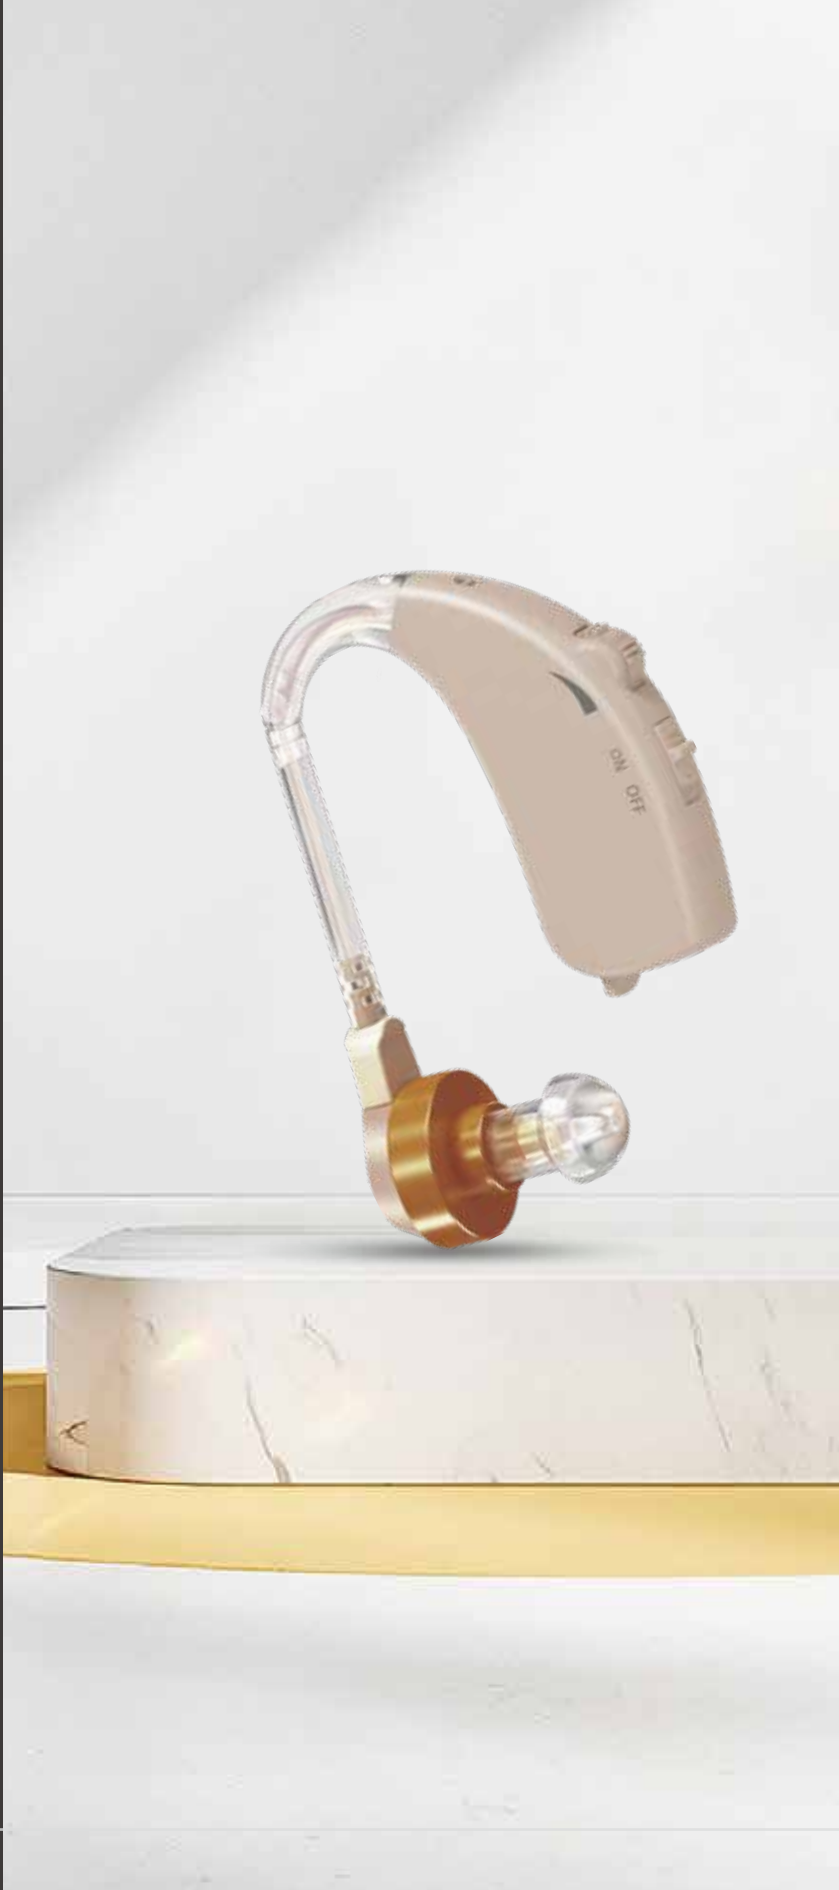

10 Days Long Standby Time



BASIC PARAMETERS

Type:	BTE Hearing aid	Frequency response range:	(not less than) 300Hz~3000Hz
OSPL90 max:	≤130dB+3dB	Product size:	40mm×43mm×9mm (L×W×H)
High frequency average for 90db input:	120dB±4dB	Product weight:	7.9g (without battery)
Full-on acoustic gain supply:	35dB±5dB	Power supply:	DC 1.45V (Battery Size A675 Lithium battery×1)

LIMITLESS
VOLUME
ADJUSTMENT

HEAR THE WORLD

Behind-Ear Hearing Aid

Model: HTD6102

- 7-10 days continuous battery use
- Stepless volume adjustment with scrolling wheel
- Invisible and ergonomic design fits behind the ear comfortably
- Lightweight & comfortable long-time wearing
- Sweat proof and non-slip
- Small, Medium, large tips meet different users
- Medical silicone material resists deformation



Smart Noise Reduction

Natural Sound



10 days long standby time



Invisible design,
comfortable wearing



Prevent sweat damp

BASIC PARAMETERS

Type:	BTE Hearing aid	Frequency response range:	(not less than) 300Hz~3000Hz
OSPL90 max:	≤130dB+3dB	Product size:	40mm×43mm×9mm(L×W×H)
High frequency average for 90db input:	120dB±4dB	Product weight:	5.4g (without battery)
Full-on acoustic gain supply:	35dB±5dB	Power supply:	DC 1.45V (Battery Size A675 Lithium battery×1)



ANTI-BACKFLOW & ANTI-OVERFLOW

BETTER CLEANNESS ASSURED



Electric Nasal Aspirator

Model: HTD2601/2602

- Global technical patented anti-backflow
- Unique three-level storage design
- Pulse suction technology
- Three gears suction levels
- Food grade silicone material
- Disassembled parts for easier cleaning
- Disassembled parts can be boiled in 100°C boiling water
- USB rechargeable battery
- Low noise and comfortable
- Waterproof & dustproof



Anti-Backflow
Patent




Smart pulse Automatic
Suction Adjustment Mode



USB fast rechargeable



Anti-backflow patent



Low noise and comfortable

BASIC PARAMETERS

Suction range:	≤68kPa	Dimension:	185mm×42mm×42mm(L×W×H)
Flow Value:	≥1.6L/min	Product weight:	167g
Noise:	≤70dB(A)	Internal power supply:	DC 3.7V (Rechargeable lithium battery)
Automatic power-off:	≤65seconds	External power supply:	DC 5V




EFFICIENT & GENTLE


PULSE SUCTION POWER

Electric Nasal Aspirator

Model: H2603




Pulse Suction



- Global technical patented anti-backflow
- Unique three-level storage design
- Pulse suction technology
- Three gears suction levels
- Food grade silicone material
- Disassembled parts for easier cleaning
- Disassembled parts can be boiled in 100°C boiling water
- Low noise and comfortable
- Waterproof & dustproof



Anti-Overflow & Anti-Backflow



BASIC PARAMETERS

Suction range:	≤68kPa	Dimension:	187mm×42mm×57mm(L×W×H)
Flow Value:	≥1.6L/min	Product weight:	194g (with battery)
Noise:	≤70dB(A)	Internal power supply:	DC 4.5V (3 AAA alkaline batteries)
Automatic power-off:	≤65seconds		



THREE-LEVEL STORAGE BIN STRUCTURAL DESIGN

CLEAN AND HYGIENIC
EASY TO REMOVE AND WASH

Electric Nasal Aspirator

Model: H2605

- Unique three-level storage design
- Pulse Suction technology
- Three gears suction levels
- Food grade silicone material
- Disassembled parts for easier cleaning
- Disassembled parts can be boiled in 100°C boiling water
- Low noise and comfortable
- Waterproof & dustproof



BASIC PARAMETERS

Suction range:	≤68kPa	Dimension:	165mm×51mm×42mm (L×W×H) (without protective cover)
Flow Value:	≥1.6L/min	Product weight:	180g (with battery, without protective cover)
Noise:	≤70dB (A)	Internal power supply:	DC 4.5V (3 AAA alkaline batteries)
Automatic power-off:	≤65seconds		




ANTI-BACKFLOW & ANTI-OVERFLOW

HYGIENIC AND CLEAN

Electric Nasal Aspirator


Model: H2606




Anti-Backflow
Patent



- Global technical patented anti-backflow
- Smart Pulse Automatic
- Ergonomic design
- Food grade silicone soft nozzle
- Automatic power off without operation
- Simple screen display
- Three levels of suction power adjustment
- Low noise and comfortable



Smart pulse Automatic
Suction Adjustment Mode

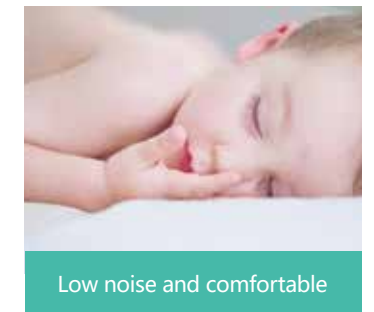

BASIC PARAMETERS

Suction range:	≤68kPa	Dimension:	165mm×51mm×42mm (L×W×H) (without protective cover)
Flow Value:	≥1.6L/min	Product weight:	180g (with battery, without protective cover)
Noise:	≤70dB (A)	Internal power supply:	DC 4.5V (3 AAA alkaline batteries)
Automatic power-off:	≤65seconds		

DUST-PROOF SECONDARY STORAGE DESIGN

PORTABLE AND HYGIENIC
BETTER TO CARE YOUR HEALTH

Compressor Nebulizer

Model: HTD2810



- One button operation, more simple atomization
- Large flow, improve atomization efficiency
- Low noise design, better atomization experience
- Bottom bevel design, less residue
- Micron atomization, fine and smooth
- Smoothly fog, no choking



Maximum Nebulization Rate $\geq 0.2\text{ml/Min}$
Easier To Absorb



One button operation,
more simple atomization



Large flow,
improve atomization efficiency



Low noise design,
better atomization experience

BASIC PARAMETERS

Max nebulization rate:	$\geq 0.2\text{mL/min}$	Sound pressure:	$< 75\text{dB(A)}$
Particle size:	$4.8\mu\text{m}\pm 25\%$	Product size:	$185\text{mm}\times 163\text{mm}\times 272\text{mm(L}\times\text{W}\times\text{H)}$
Nebulizer cup capacity:	8ml	Product weight:	1.8kg
Medication residual :	$\leq 1.5\text{mL}$	Power supply:	AC 230V 50Hz / 100V-127V 60Hz

DUAL ATOMIZATION ADJUSTMENT MODE

SMOOTH & COMFORTABLE
PREVENT THROAT CHOKING

Compressor Nebulizer


Model: HTD2811



- Micro-size nebulization particles, no choking
- Bottom bevel design, less residue
- Two suction modes, suitable for different atomization needs
- One button operation, easy to use
- Oil-free compressor pump, fresh and natural
- Built in air filter element, clean atomization



Large Flow
Improve Atomization Efficiency



BASIC PARAMETERS

Max nebulization rate:	≥0.2mL/min	Sound pressure:	< 75dB(A)
Particle size:	4.8μm±25%	Product size:	185mm×163mm×272mm(L×W×H)
Nebulizer cup capacity:	8ml	Product weight:	1.8kg
Medication residual :	≤1.5mL	Power supply:	AC 230V 50Hz / 100V-127V 60Hz

ONE BUTTON

EASY OPERATION

Electronic Blood Pressure Monitor

Model: HTD6601



- Incorrect operation reminder
- Blood pressure and pulse
- Intelligent pressurization, comfortable & accuracy
- Group management for comparison
- Large LCD display
- Battery + USB interface design



Large LCD With Backlight
Clear And Intuitive



Large LCD display



Intelligent pressurization,
comfortable & accuracy



Group management
for comparison

BASIC PARAMETERS

Measurement method:	Oscillometric	Wide range rigid cuff:	22cm~32cm or 22cm~42cm
Blood pressure output:	0~299mmHg	Auto power off:	≤65 seconds
Pulse output range:	40~180 beats/min	Product size:	141mm×106mm×70mm(L×W×H)
Pressure accuracy:	±3mmHg	Product weight:	323g (without battery)
Pulse measurement accuracy:	±5%	Internal power supply:	DC 6.0V (4 AA alkaline batteries)
Memories:	user1 x90 + user2 x90 +user3 x18	External power supply:	DC 5V (USB)

LARGER SCREEN

READING EASIER

Electronic Blood Pressure Monitor

Model: HTD6602



Intelligent Pressurization Technology



One button easy operation



Unique algorithms, sense blood pressure changes



Battery + USB interface design

BASIC PARAMETERS

Measurement method:	Oscillometric	Wide range rigid cuff:	22cm~32cm or 22cm~42cm
Blood pressure output:	0~299mmHg/0~39.9kPa	Auto power off:	≤65 seconds
Pulse output range:	40~180 beats/min	Product size:	141mm×106mm×70mm (L×W×H)
Pressure accuracy:	±3mmHg (±0.4kPa)	Product weight:	323g (without battery)
Pulse measurement accuracy:	±5%	Internal power supply:	DC 6.0V (4 AA alkaline batteries)
Memories:	user1 x180	External power supply:	DC 5V (USB)

- Incorrect operation reminder
- Intelligent pressurization technology
- One button easy operation
- Unique algorithms, sense blood pressure changes
- Battery + USB interface design
- High accuracy: ±3mmHg (Blood pressure)



VOICE GUIDANCE

INTELLIGENT CARE

Electronic Blood Pressure Monitor

Model: HTD6603



- Intelligent pressurization, comfortable & accuracy
- Large LCD with backlight
- One button easy operation
- Voice broadcast function
- Incorrect operation reminder
- High accuracy: ± 3 mmHg (Blood pressure)

Battery + USB Interface Design



Intelligent pressurization, comfortable & accuracy



Voice broadcast function



Large LCD with backlight

BASIC PARAMETERS

Measurement method:	Oscillometric	Wide range rigid cuff:	22cm~32cm or 22cm~42cm
Blood pressure output:	0~299mmHg	Auto power off:	≤ 65 seconds
Pulse output range:	40~180 beats/min	Product size:	141mm \times 106mm \times 70mm (L \times W \times H)
Pressure accuracy:	± 3 mmHg	Product weight:	323g (without battery)
Pulse measurement accuracy:	$\pm 5\%$	Internal power supply:	DC 6.0V (4 AA alkaline batteries)
Memories:	user1 x180	External power supply:	DC 5V (USB)



LARGE LCD & BIG FONT

CLEARER VISION AT NIGHT

Electronic Blood Pressure Monitor

Model: HTD6605



- One button easy operation
- Personal clear narration
- Battery + USB interface design
- Multi-user memory
- Large LCD with backlight
- High accuracy: $\pm 3\text{mmHg}$ (Blood pressure)




Unique Algorithms Sense Blood Pressure Changes



One button easy operation



Voice broadcast function



Group management
for comparison

BASIC PARAMETERS

Measurement method:	Oscillometric	Wide range rigid cuff:	22cm~32cm or 22cm~42cm
Blood pressure output:	0~299mmHg/0~39.9kPa	Auto power off:	≤ 65 seconds
Pulse output range:	40~180 beats/min	Product size:	141mm \times 106mm \times 70mm (L \times W \times H)
Pressure accuracy:	$\pm 3\text{mmHg}$ ($\pm 0.4\text{kPa}$)	Product weight:	323g (without battery)
Pulse measurement accuracy:	$\pm 5\%$	Internal power supply:	DC 6.0V (4 AA alkaline batteries)
Memories:	user1 x90 + user2 x90 +user3 x18	External power supply:	DC 5V (USB)

LARGE LCD WITH THREE-COLOR BACKLIGHT

Electronic Blood Pressure Monitor

Model: D6606



- Incorrect operation reminder
- Intelligent pressurization, comfortable & accuracy
- One button easy operation
- Dual-user memory grouping
- Battery + USB interface design
- High accuracy: ± 3 mmHg (Blood pressure)



Voice Broadcast



One button easy operation



Dual-user memory grouping



Both Battery & USB powered design

BASIC PARAMETERS

Measurement method:	Oscillometric	Wide range rigid cuff:	22cm~32cm
Blood pressure output:	0~299mmHg/0~39.9kPa	Auto power off:	≤ 65 seconds
Pulse output range:	40~180 beats/min	Product size:	116mm×110mm×50mm(L×W×H)
Pressure accuracy:	± 3 mmHg (± 0.4 kPa)	Product weight:	278g (without battery)
Pulse measurement accuracy:	$\pm 5\%$	Internal power supply:	DC 6.0V (4 AA alkaline batteries)
Memories:	user1 x99 + user2 x99	External power supply:	DC 5V (USB)